28

South East part of the original plat of the Town of Napoleon—

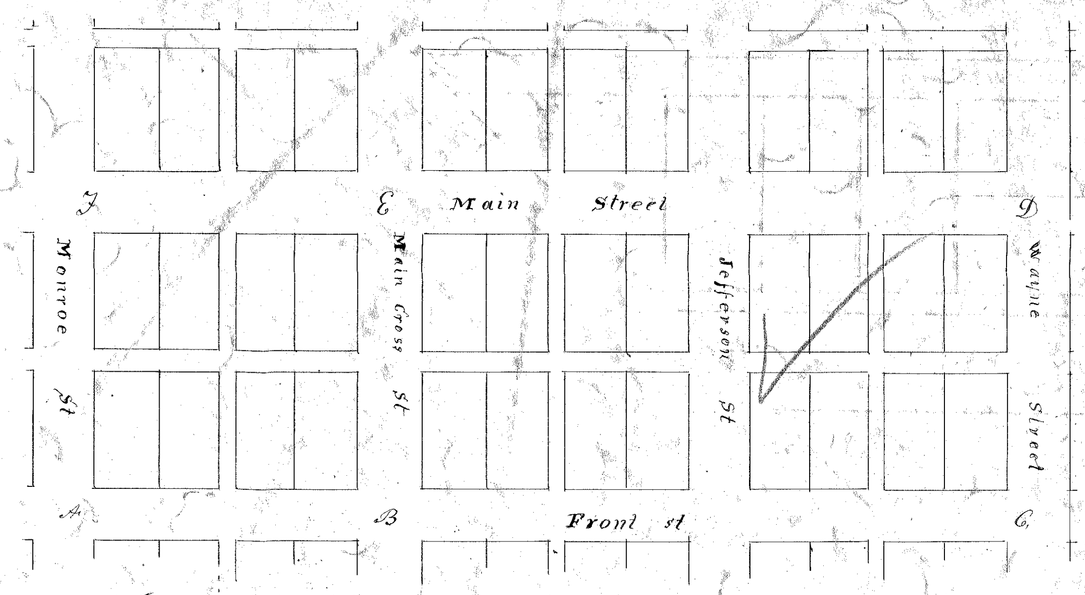

To the Hon. Counsel of the Town of Napoleon, Gmts. Pursuant to your order I surveyed that part of the original plat of the Town of Napoleon hereto annexed. The original corner stones are standing at A & B. on measuring the distance with my chain I found that the original measurement was to great by exceeding the standard by one & five eighth inches per rod equal to 6½ inches to the standard chain I accordingly lengthened my chain so as to correspond to the original measurement and made the survey setting stakes for the corners of all the lots marked on the annexed plat excepting the alley stakes which were only set so as to show the division of the lots North and South but not in line East and west for the reason that for the reason that the line East and West would run inside of most of the lots and there was so many fences and shrubbery in the way it was quite difficult to do so. The width of the alley was however correctly marked on the Streets. The width of the alley and Streets are standard measurement only. I set the stakes on Main Street as represented by the dots reducing the width of the Street 12½ on each side leaving the Street four rods wide only. Quite a large proportion of the lots are on the original line and in the Street. The counsel in their wisdom can take such action in the matter of the width as may be legal or advisable. If the original width is adheared to we have only to measure back 12½ links on each side. To avoid further trouble and inconvenience in finding lines I planted stones at C. D. E. & F. That at C is two and one half rods south of the North line of Front Street and one rod East of the West line of Wayne Street and on the center line of Main Street. D. is one rod east of the West line of Wayne Street and on the center line of Main Street. E. is on the center line of Main and Main Cross Street F. Is on the center line of Main Street on the East line of Monroe Street. I deem it quite necessary that these corners be established as the permanent boundry of that part of the Town, and a record thereof with the distances and the discrepancies between the standard chain and the original measurement in the Records of the Town Plat in the Recorders Office of this County. It will obviously save trouble hereafter.

Respectfully submitted H. Strong Surveyor

The above Plat and survey is adopted and ordered to be Recorded in the Record of Town Plats of Henry County. By Order of the Council. W. F. Daggett Recorder

Rec'd for Record June 6th Recorded July 12th 1863. W. F. Daggett Recorder of Henry Co Ohio

---

Plat of A. H. Kagy's Subdivision of Out Lot No 14.

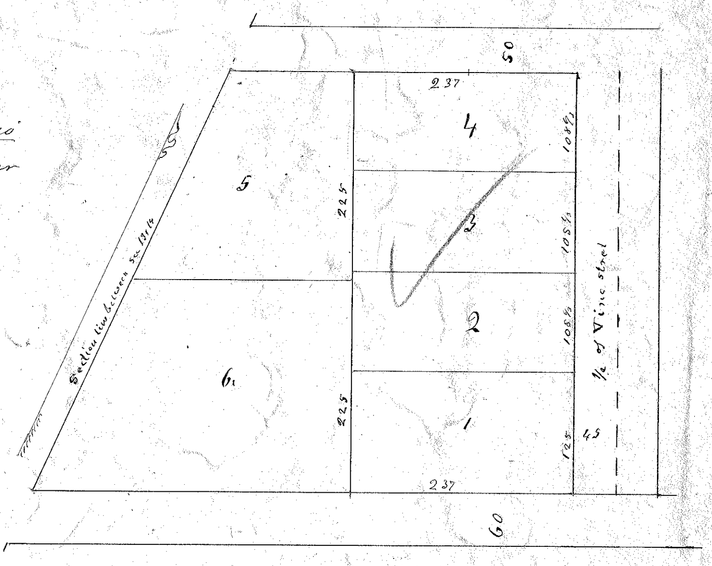

Field notes of the foregoing plat being a subdivision of Out lot no 14. in the Town of Napoleon laid out and subdivided in the manner represented on the Plat hereunto above annexed. Lot No 1. is 125 links wide and 237 deep Lots No. 2. 3. & 4 are each 108⅓ links wide and 237 links deep. Lots No. 5 and 6 are 225 wide and extend back to the section line between sections 13 & 14. The half street on the East side of said out lot is 45 links wide— Surveyed and plated for A H Kagy June 20th 1865 by H. Strong Surveyor.

I A. H. Kagy do hereby certify that the above plat was made at my request and that I adopt the same as an addition to the Town of Napoleon—

A. H. Kagy

The State of Ohio
Henry County ss Before me H Strong county Surveyor within and for said County personally came A H Kagy and acknowledged the signing of the above certificate to be his act and deed for the purposes therein expressed— June 21st 1865. H. Strong County Surveyor

Received for Record July 12 Recorded August 22 1865

W. F. Daggett Recorder