LEGAL NOTICE
NOTICE TO CONTRACTORS

Sealed proposals will be received at the Office of the Napoleon Township Trustees, located at 203 West Main Street, Napoleon, Ohio until Monday, May 20, 2013 at 8:00 P.M. for the improvement of various Township Roads:

SECTION A: Chipseal Various Township Roads
SECTION B: Patching, Resurfacing, Widening and Berming of Various Township Roads

Napoleon Township, Henry County, Ohio, in accordance with estimates and specifications on file with the Napoleon Township Fiscal Officer.

Bids that are mailed need to be sent to Napoleon Twp., P.O. Box 686, Napoleon, OH 43545.

Bidding documents are available online at www.henrycountyengineer.com

Bids are to be submitted on a unit price basis.

The contracts will be awarded to the lowest, competent and responsible bidder.

Each bidder is required to file with his bid a bid guaranty in the form of either:

1. A bond for the full amount of the bid; or

2. A certified check, cashier's check or letter of credit pursuant to Chapter 1305 of the Ohio Revised Code, in the amount of ten (10%) percent of the bid price as guarantee that, if the contract be awarded on such bid, the bidder will enter into a contract and the performance of it will be properly secured.

The successful bidder, if using a (10%) bid guaranty, shall be required to provide a contract performance and payment bond for the full amount of the bid.

Estimated cost of the improvements is: Section A: $66,104.99
Section B: $184.328.41

Prevailing Wage Rates per Section 4115 of the Ohio Revised Code shall prevail on this project.

The Board of Trustees reserves the right to award separate contracts for the above noted improvements. The Board of Trustees reserves the right to reject any or all bids.

BY ORDER OF
THE BOARD OF TRUSTEES
NAPOLEON TOWNSHIP
HENRY COUNTY, OHIO

Susan Witt, Fiscal Officer
P.O. Box 686
Napoleon, OH 43545

Please publish once in April 29, 2013 publication

ROAD BIDDING BLANK – SECTION A

To: Board of Trustees
Napoleon Township
Henry County, Ohio

Date of Sale: Monday, May 20, 2013 @ 8:00 PM

Chipseal Various Township Roads

PROPOSAL

Ref. #	Item	Quantity	Unit	Description	Unit Price	Total Price
1	409	233	Ton	Seal Coat, aggregate No. 8a (washed), applied and compacted at 28 lbs. per square yard	$_____	$_____
2	409	584	Ton	Seal Coat, aggregate No. 9a (washed), applied and compacted at 21 lbs. per square yard	$_____	$_____
3	409 (MWS 90)	23,984	Gal	Seal Coat, bituminous material applied at the rate listed in the attached Engineer's Estimate (Varies from 0.31 to 0.40 Gal/S.Y.)	$_____	$_____
4	409S	7.8	Miles	Brooming finished pavement	$_____	$_____
5	614	1	L.S.	Maintaining Traffic	$_____	$_____
6	624	1	L.S.	Mobilization	$_____	$_____
7	103.05	1	L.S.	Contract Performance & Payment Bond	$_____	$_____
				TOTAL AMOUNT OF BID		**$_____**

Date of Sale: Monday, May 20, 2013 @ 8:00 P.M.

Section A - Chipseal Various Township Roads

Prevailing Wage Rates per Section 4115 of the Ohio Revised Code shall prevail on this project. A copy of the applicable wage rates may be obtained from the State of Ohio Wage and Hour Division via the internet at the following web site:

http://www.com.ohio.gov/laws

Should the bidder not have access to the internet, a complete set of the applicable wage rates are available at the office of the Henry County Engineer. A copy will be provided if requested.

Contractors are required to furnish the Township with a certificate of insurance in the minimum amount of $1,000,000.00 primary and $1,000,000.00 umbrella coverage. The Township, its elected office and employees shall be named as additional insured with respect to all activities under any agreement resulting from this bidding. The certificate of insurance shall provide that such insurance shall not be cancelled without thirty (30) days prior written notice to the Township. Contractors will replace certificate for any insurance expiring prior to the effective end date under any agreement resulting from this bidding.

Contractors shall maintain Worker's Compensation coverage as required by Ohio law. A copy of a valid Worker's Compensation certificate shall be submitted with the bid.

The Contractor shall indemnify and hold harmless the Township, its agents and employees from any and all losses, claims, damages, lawsuits, costs, judgments, expenses or any other liabilities which they may incur as a result of bodily injury, sickness, disease or death, or injury to or destruction of tangible property including the loss of use resulting therefrom, caused in whole or part by the negligent act or omission of the Contractor or any person directly or indirectly employed by any of them or any person for whose act any of them may be liable.

Accompanying this proposal is a bid guaranty in the form of either:

1) A bond for the full amount of the bid, on the above improvement; or

2) A certified check, cashier's check or letter of credit pursuant to Chapter 1305 of the Ohio Revised Code, in the amount of ten percent (10%) of the bid on the above improvements, payable to the order of the Board of Trustees, NAPOLEON TOWNSHIP, which check or bond is to be forfeited if, in case this proposal is accepted, the undersigned shall fail to execute a contract within ten (10) days of Notice of Award.

This contract shall be under the direct supervision of the Napoleon Township Trustees.

All items are approximate, and final measurement of completed items will govern final payment.

In the event of discrepancy between the unit and total price bid, the unit price shall prevail. The unit prices shall remain in effect and held firm for the term of this contract.

The Contractor shall be responsible for all construction one (1) year after project completion and acceptance. The Contractor shall make all corrections as necessary by reason of noted defects. The Trustees will give notice of observed defects with reasonable promptness. In the event that the Contractor fails to make repairs, adjustments or complete other work which may be required by such defects, the Trustees may do so and charge the Contractor the costs incurred.

The Board of Trustees reserves the right to reject any or all bids.

The chipseal work shall be completed on or before September 1, 2013.

For each calendar day that any work shall remain uncompleted after the stated completion date the appropriate sum, in accordance with the schedule of liquidated damages per Section 108.07 of the Standard Specifications of the State of Ohio Department of Transportation, will be deducted from any monies due the Contractor, not as a penalty but as liquidated damages; provided however, that due account shall be taken of any adjustment of the completion date granted by the Board of Trustees of Napoleon Township.

A work day will be counted as lost if the Contractor's efficiency is reduced more than fifty (50%) percent on the critical items under construction at that time. Weekends and holidays will not be counted as lost work days.

Submitted By:_____
CONTRACTOR

Address:_____

_____

Signed By:_____
Name/Title

_____
Phone Number

_____
Fax Number

_____
E-mail

FILE : 2013 NAPOLEON TOWNSHIP CHIPSEAL ENGINEER'S ESTIMATE
RUN DATE: JANUARY 18, 2013

	ROAD	FROM	TO	LENGTH FT	WIDTH FT	#/SYD	NO.8A TONS	#/SYD	NO.9A TONS	409 GAL/SYD	(MWS90) GAL	408 GAL/SYD	(AEP) GAL	409S MILES	REMARKS
1	TWP. RD. N	HMA JOINT	CO. RD. 424	17425	16		0	21	325	0.31	9603		0	3.30	
2							0		0		0		0	0.00	
3	TWP. RD. 18	CO. RD. P	TWP. RD. R	10720	14	28	233		0	0.40	6670		0	2.03	
4							0		0		0		0	0.00	
5	TWP. RD. Q1	TWP. RD. 18	U.S. 6	10450	18		0	21	219	0.31	6479		0	1.98	
6							0		0		0		0	0.00	
7	TWP. RD. 15A	U.S. 6	S. 2400'	2400	14		0	21	39	0.33	1232		0	0.45	
8							0		0		0		0	0.00	
9							0		0		0		0	0.00	
10							0		0		0		0	0.00	
11							0		0		0		0	0.00	
12							0		0		0		0	0.00	
13							0		0		0		0	0.00	
							233		584		23984		0	7.76	

NOTES AND SPECIFICATIONS:

1) ITEM 409 SEAL COAT SHALL BE APPLIED BY THE CONTRACTOR PER (1997) O.D.O.T. CONSTRUCTION AND MATERIAL SPECIFICATIONS, WITH THE BELOW EXCEPTIONS.
2) ITEM 409 SEAL COAT COVER AGGREGATE SHALL BE PAID BY THE TON RATHER THAN BY THE CUBIC YARD.
3) THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE ORDERING OF ALL MATERIALS.
4) ON ROADS WHICH REQUIRE TWO PASSES FOR COVERAGE, SUFFICIENT TIME SHALL PASS BEFORE THE JOINT IS SWEPT, AS DIRECTED BY THE NAPOLEON TOWNSHIP TRUSTEES.
5) ITEM 409S-BROOMING FINISHED PAVEMENT, SHALL BE PERFORMED WITHIN 24 HOURS AFTER NO. 8A AND NO. 9A SEALS HAVE BEEN COMPLETED.
6) ALL ROADS SHALL HAVE WARNING SIGNS PLACED WHEN UNDER CONSTRUCTION.
7) ALL TRUCKS SHALL HAUL WITHIN LEGAL LOAD LIMITS.
8) IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO CALL ROAD CLOSINGS TO SCHOOLS, SHERIFF'S OFFICE, ETC.
9) ALL INTERSECTIONS SHALL BE SWEPT INWARDS APPROXIMATELY 500' FROM ADJOINING ROADS TO INSURE A SKID FREE SURFACE AND TO ELIMINATE EXCESS STONE AT INTERSECTIONS.
10) ALL INTERSECTION APPROACHES, BRIDGE APPROACHES, AND BRIDGE DECKS SHALL BE SEALED AS DIRECTED BY THE NAPOLEON TOWNSHIP TRUSTEES. THIS COST SHALL BE INCLUDED IN MAIN LINE SEALING.
11) ITEM 409S-BROOMING FINISHED SURFACE. THE CONTRACTOR MAY BE ASKED TO MAKE ADDITIONAL BROOMING PASSES AS DIRECTED BY THE NAPOLEON TOWNSHIP TRUSTEES.
12) BITUMINOUS MATERIAL USED SHALL BE MWS90.
13) COMPLETETION DATE FOR NAPOLEON TOWNSHIP CHIPSEAL PROJECT SHALL BE SEPTEMBER 1, 2013.
14) THE GRADATION SPECIFICATION FOR NO. 8A AND NO. 9A AGGREGATE (WASHED) SHALL BE AS SHOWN BELOW:

	NO. 8A	NO.9A
1/2	100	-
3/8	85-100	100
#4	0-15	85-100
#8	0-5	0-20
#16	0-2	0-5
#50	-	0-2

15) THE MINIMUM WIDTH OF THE CHIP SPREADER SHALL BE 20'.
16) ROADS SHALL BE SWEPT NO SOONER THAN 24 HOURS PRIOR TO CHIPSEAL APPLICATION.
17) ALL CONCRETE AND HOT MIX ASPHALT DRIVEWAYS SHALL BE SWEPT OUT AFTER ROADWAYS HAVE BEEN SWEPT.
18) O.D.O.T. ASPHALT BINDER ADJUSTMENT (MWS90) SHALL NOT APPLY TO THIS PROJECT.
19) THE MINIMUM WIDTH OF THE DISTRIBUTOR (SPRAY BAR) FOR THE 2013 NAPOLEON TOWNSHIP CHIPSEAL PROJECT SHALL BE 20'. ITEM 422.03 EQUIPMENT (PARAGRAPH 2) AND ITEM 407.03 EQUIPMENT PER O.D.O.T. CONSTRUCTION AND SPECIFICATIONS MANUAL DATED JANUARY 1, 2010 SHALL APPLY.
20) INTERSECTION RADIUS SHALL BE "HAND WANDED" AS DIRECTED BY THE NAPOLEON TOWNSHIP TRUSTEES.

ROAD BIDDING BLANK - SECTION B

To: Board of Trustees
Napoleon Township
Henry County, Ohio

Date of Sale: Monday, May 20, 2013 @ 8:00 PM

Section A: Patching, Resurfacing, and Berming of Various Township Roads per attached description and specifications.

PROPOSAL

Ref. #	Item	Quantity	Unit	Description	Unit Price	Total Price
1	448	1775	Tons	Asphalt Concrete Surface Course, Type 1M	$_____	$_____
2	448	50	Tons	Asphalt Concrete Surface Course, Type 1M including tack coat @ 0.05 Gal./S.Y. (used for patching as directed by Township)	$_____	$_____
3	407	2,125	Gal.	Bituminous Tack Coat	$_____	$_____
4	617	801	Tons	Reconditioning Shoulders (Berming)	$_____	$_____
5	614	1	L.S.	Maintaining Traffic	$_____	$_____
6	624	1	L.S.	Mobilization	$_____	$_____
7	103.05	1	L.S.	Contract Performance & Payment Bond	$_____	$_____
				TOTAL AMOUNT OF BID		**$_____**

Date of Sale: Monday, May 20, 2013 @ 8:00 P.M.

SECTION B: Patching, Resurfacing, and Berming of Various Township Roads

Prevailing Wage Rates per Section 4115 of the Ohio Revised Code shall prevail on this project. A copy of the applicable wage rates may be obtained from the State of Ohio Wage and Hour Division via the internet at the following web site:

http://www.com.ohio.gov/laws

Should the bidder not have access to the internet, a complete set of the applicable wage rates are available at the office of the Henry County Engineer. A copy will be provided if requested.

Contractors are required to furnish the Township with a certificate of insurance in the minimum amount of $1,000,000.00 primary and $1,000,000.00 umbrella coverage. The Township, its elected office and employees shall be named as additional insured with respect to all activities under any agreement resulting from this bidding. The certificate of insurance shall provide that such insurance shall not be cancelled without thirty (30) days prior written notice to the Township. Contractors will replace certificate for any insurance expiring prior to the effective end date under any agreement resulting from this bidding.

Contractors shall maintain Worker's Compensation coverage as required by Ohio law. A copy of a valid Worker's Compensation certificate shall be submitted with the bid.

The Contractor shall indemnify and hold harmless the Township, its agents and employees from any and all losses, claims, damages, lawsuits, costs, judgments, expenses or any other liabilities which they may incur as a result of bodily injury, sickness, disease or death, or injury to or destruction of tangible property including the loss of use resulting therefrom, caused in whole or part by the negligent act or omission of the Contractor or any person directly or indirectly employed by any of them or any person for whose act any of them may be liable.

Accompanying this proposal is a bid guaranty in the form of either:

1) A bond for the full amount of the bid, on the above improvement; or

2) A certified check, cashier's check or letter of credit pursuant to Chapter 1305 of the Ohio Revised Code, in the amount of ten percent (10%) of the bid on the above improvements, payable to the order of the Board of Trustees, NAPOLEON TOWNSHIP, which check or bond is to be forfeited if, in case this proposal is accepted, the undersigned shall fail to execute a contract within ten (10) days of Notice of Award.

This contract shall be under the direct supervision of the Napoleon Township Trustees.

All items are approximate, and final measurement of completed items will govern final payment.

In the event of discrepancy between the unit and total price bid, the unit price shall prevail. The unit prices shall remain in effect and held firm for the term of this contract.

The Contractor shall be responsible for all construction one (1) year after project completion and acceptance. The Contractor shall make all corrections as necessary by reason of noted defects. The Trustees will give notice of observed defects with reasonable promptness. In the event that the Contractor fails to make repairs, adjustments or complete other work which may be required by such defects, the Trustees may do so and charge the Contractor the costs incurred.

The Board of Trustees reserves the right to reject any or all bids.

The resurfacing and berming work shall be completed on or before August 1, 2013.

For each calendar day that any work shall remain uncompleted after the stated completion date the appropriate sum, in accordance with the schedule of liquidated damages per Section 108.07 of the Standard Specifications of the State of Ohio Department of Transportation, will be deducted from any monies due the Contractor, not as a penalty but as liquidated damages; provided however, that due account shall be taken of any adjustment of the completion date granted by the Board of Trustees of Napoleon Township.

A work day will be counted as lost if the Contractor's efficiency is reduced more than fifty (50%) percent on the critical items under construction at that time. Weekends and holidays will not be counted as lost work days.

Submitted By:_____
CONTRACTOR

Address:_____

_____

Signed By:_____
Name/Title

_____
Phone Number

_____
Fax Number

_____
E-mail

FILE: 2013 NAPOLEON TOWNSHIP PAVING ENGINEER'S ESTIMATE
RUN DATE : JANUARY 18, 2013

	ROAD RESURFACING:	FROM	TO	LENGTH FT.	WIDTH FT.	ITEM 448-1 SURF. IN.	#/SYD	TONS	ITEM 448-1 INT. IN.	#/SYD	TONS	301 WIDE. TONS	ITEM 407 GAL/SYD	GAL	ITEM 617 IN.T	W	#/SYD	TONS	448-1 PATCH TONS	
1								0			0			0				0	0	1
2	TWP. RD. Q1	CO. LINE	TWP. RD. 18	5280	18	1.50	167	882			0		0.10	1056	1.50	2.00	159	215	0	2
3								0			0			0				0	0	3
4	TWP. RD. R1	CO. LINE	U.S. 6	9625	10	1.50	167	893			0		0.10	1069	1.50	3.00	159	587	0	4
5								0			0			0				0	0	5
6								0			0			0				0	0	6
7								0			0			0				0	0	7
8								0			0			0				0	0	8
9								0			0			0				0	0	9
10								0			0			0				0	0	10
11								0			0			0				0	0	11
12								0			0			0				0	0	12
13	PATCHING	AS DIRECTED	BY TOWNSHIP					0			0			0				0	50	13
14								0			0			0				0	0	14
15								0			0			0				0	0	15
16								0			0			0				0	0	16
17								0			0			0				0	0	17
18								0			0			0				0	0	18
19								0			0			0				0	0	19
20								0			0			0				0	0	20
21								0			0			0				0	0	21
22								0			0			0				0	0	22
23								0			0			0				0	0	23
24								0			0			0				0	0	24
25								0			0			0				0	0	25
								1775			0	0		2125				801	50	

SPECIFICATIONS:

1) O.D.O.T. CONSTRUCTION AND MATERIAL SPECIFICATIONS (DATED 2010) SHALL APPLY.
2) INTERSECTION APPROACHES ARE TO BE RESURFACED AS DIRECTED BY NAPOLEON TOWNSHIP TRUSTEES.
3) ITEM 617 STABILIZED CRUSHED AGGREGATE (BERMING) SHALL INCLUDE DRIVE APPROACHES AND MAILBOX TURNOUTS.
4) WARNING SIGNS SHALL BE ERECTED WHEN ITEM 617 (BERMING) HAS NOT BEEN PERFORMED. (LOW SHOULDER, ETC.)
5) ALL HAUL TRUCKS SHALL BE WITHIN LEGAL LOAD LIMITS.
6) ALL HAUL ROUTES SHALL BE APPROVED BY NAPOLEON TOWNSHIP TRUSTEES PRIOR TO PLACEMENT OF MATERIAL.
7) THREE WHEEL ROLLERS SHALL NOT BE USED ON 2013 PAVING PROJECTS.
8) IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO CALL ROAD CLOSINGS TO SCHOOLS, SHERIFF'S OFFICE, ETC.
9) TEMPORARY CENTERLINE MARKING SHALL BE DONE AFTER SURFACE COURSES ARE COMPLETED ON ROADS GREATER THAN 16' IN WIDTH. INCLUDE THIS COST IN ITEM 448-1 SURFACE COURSE UNIT COST.
10) ITEM 617 STABILIZED CRUSHED AGGREGATE (BERMING) SHALL BE WETDOWN IN THE FIELD AS DIRECTED BY THE NAPOLEON TOWNSHIP TRUSTEES.
11) ALL TOWNSHIP ROADS SHALL BE PAVED FULL WIDTH.
12) COMPLETION DATE FOR RESURFACING AND BERMING SHALL BE AUGUST 1, 2013.
13) BINDER USED FOR 448-1 SHALL BE P.G. 64-22.
14) THE NAPOLEON TOWNSHIP TRUSTEES SHALL BE NOTIFIED OF THE SCHEDULING OF THE RESURFACING ONE WEEK PRIOR TO THE BEGINNING OF THE WORK. ALSO IF THE CONTRACTOR LEAVES NAPOLEON TOWNSHIP FOR ANOTHER JOB HE MUST GIVE AT LEAST THREE DAYS NOTICE BEFORE RETURNING.
15) ALL END JOINTS AND LONGITUDINAL JOINTS SHALL BE RIBBIONED WITH ASPHALT CEMENT AS DIRECTED BY NAPOLEON TOWNSHIP TRUSTEES.
16) ALL HOT MIX ASPHALT (HMA) PATCHES SHALL BE FEATHERED @ EACH END TO PROVIDE A SMOOTH TRANSITION TO THE TRAVELING PUBLIC.
17) ALL ROAD LIMITS, PATCHES, RADIUS, ETC. , WILL BE MARKED OUT AHEAD OF RESURFACING BY THE NAPOLEON TOWNSHIP TRUSTEES.
18) CONTRACTOR NOTE: WHEN BERMING AT RESIDENTIAL YARD AREAS USE DESCRETION OR DO NOT BERM IF YARD (GRASS AREAS) ARE FLUSH WITH EDGE OF EXISTING PAVEMENT.
19) ITEM 301 WIDENING. THE CONTRACTOR SHALL MILL OUT THE EXISTING MATERIAL, AND REMOVE FROM JOB SITE. ITEM 301 SHALL ALSO INCLUDE TRENCH COMPACTION, TACKING TRENCH FACES, PLACEMENT AND COMPACTION OF ITEM 301.

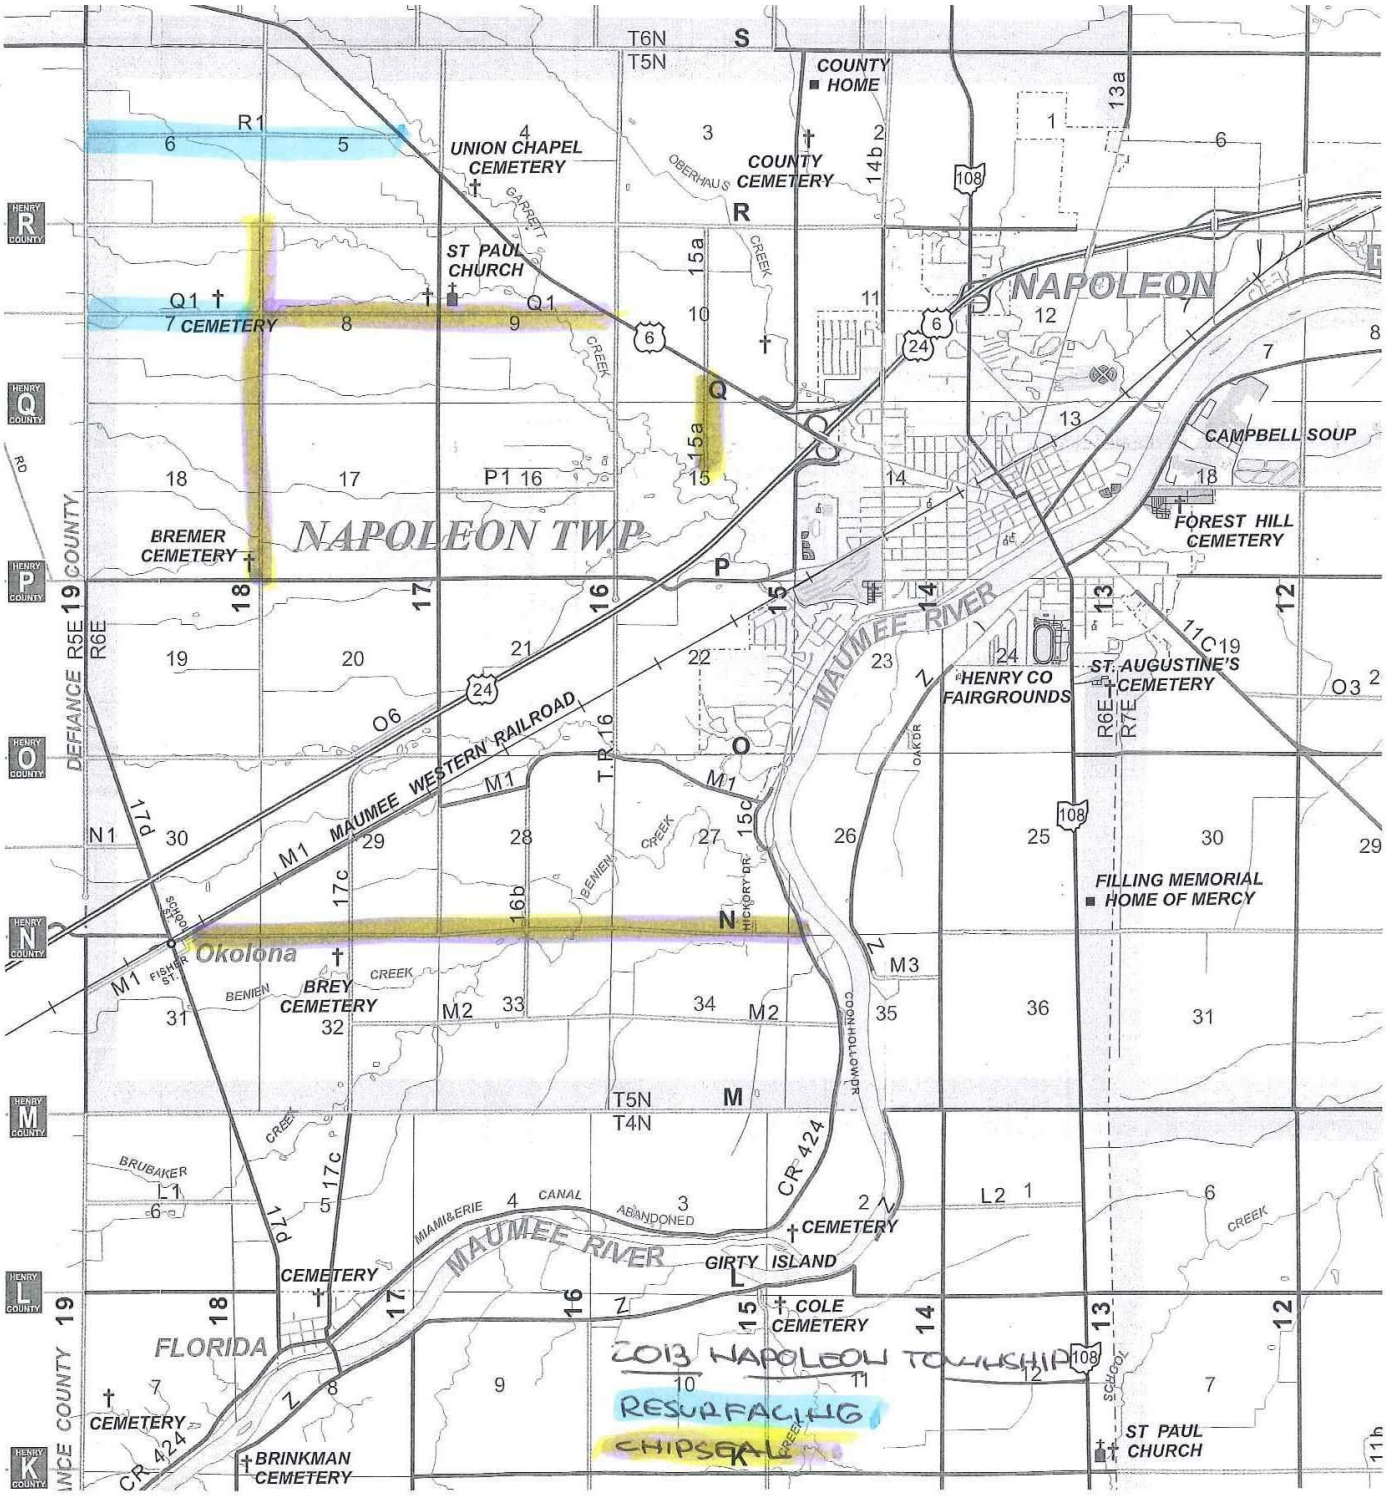
T6N
T5N
S
COUNTY HOME
UNION CHAPEL CEMETERY
COUNTY CEMETERY
OBERHAUS
GARRETT
CREEK
ST PAUL CHURCH
CEMETERY
NAPOLEON
CAMPBELL SOUP
FOREST HILL CEMETERY
NAPOLEON TWP
BREMER CEMETERY
MAUMEE RIVER
HENRY CO FAIRGROUNDS
ST. AUGUSTINE'S CEMETERY
MAUMEE WESTERN RAILROAD
OAK DR
FILLING MEMORIAL HOME OF MERCY
Okolona
FISHER ST
SCHOOL
BENIEN
BREY CEMETERY
HICKORY DR
COONHOLLOW DR
T5N
T4N
BRUBAKER
MIAMI&ERIE CANAL ABANDONED
CR 424
CEMETERY
GIRTY ISLAND
COLE CEMETERY
FLORIDA
2013 NAPOLEON TOWNSHIP
RESURFACING
CHIPSEAL
ST PAUL CHURCH
BRINKMAN CEMETERY
DEFIANCE COUNTY
HENRY COUNTY
R5E
R6E
R7E
T.R.16